
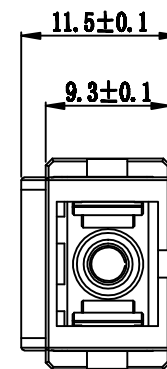
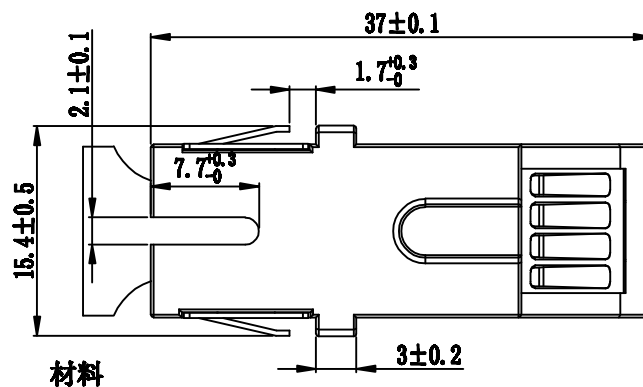



技术要求:

1. 插入损耗:  $\leq 0.2\text{db}$
2. 工作温度:  $-40\text{ (}^\circ\text{C)} \sim +85\text{ (}^\circ\text{C)}$
3. 吊重实验:  $\geq 70\text{N}$
4. 插拔次数:  $\geq 500\text{次}$



材料

序号	图纸编号	名称	数量	
1	OYH-JS-S-SC-019	销钉	1	SUS304
2	OYH-JS-S-SC-021	簧片	1	铍青铜
3	OYH-JS-S-SC-020	防尘盖	1	PC
4	OYH-JS-S-SC-022	底盖	1	PC
5	OYH-JS-S-SC-017	挂钩	2	PBT
6	OYH-JS-S-SC-018	陶瓷套管	1	陶瓷
7	OYH-JS-S-LC-052	单联弹片	1	SUS304
8	OYH-JS-S-SC-023	斜门壳体(无耳)	1	PC
9	OYH-JS-S-SC-003	T型防尘帽	1	PC

产品名称: SC推入式无耳适配器		图号: OYH-JS-ZP-010
绘制: 陈旭斌	审核:	批准:
日期: 2018.4.28	日期:	日期:
比例: 2:1	单位: mm	版本: A/2
 <b>浙江歐亞華通訊設備有限公司</b> ZHEJIANG OYARWA COMMUNICATION EQUIPMENT CO.,LTD.		